


CILINDROS TELESCOPICOS SIMPLE EFECTO

(Mod. «D»)

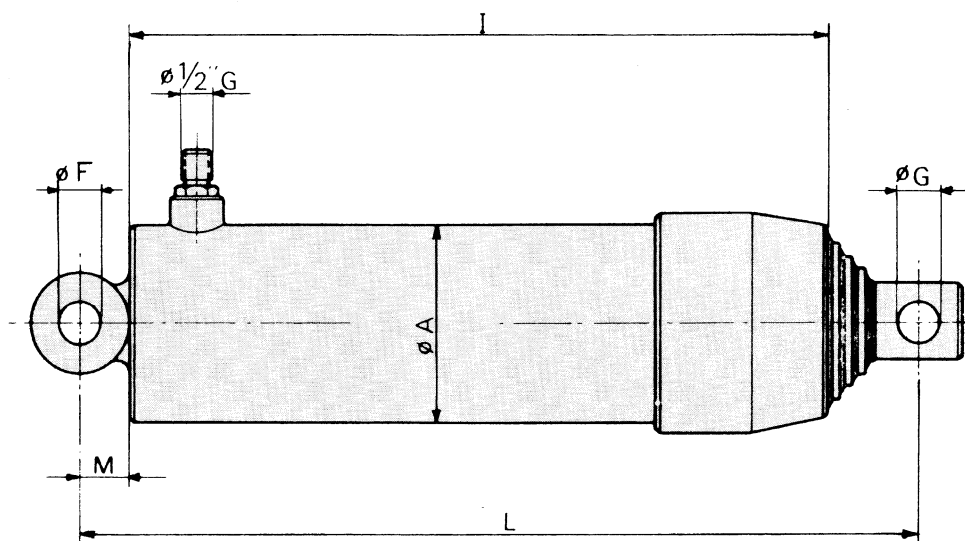

| REFERENCIA | A | F | G | I | L | M | 1° Salien. | 2° Salien. | 3° Salien. | 4° Salien. | POTENCIA Kg |
|---------------|-----|----|----|-----|-----|----|------------|------------|------------|------------|-------------|
| PT2S-85/600 | 85 | 25 | 25 | 415 | 487 | 25 | 65 | 47 | — | — | 3.500 |
| PT2S-85/700 | 85 | 25 | 25 | 465 | 537 | 25 | 65 | 47 | — | — | 3.500 |
| PT2S-100/700 | 100 | 25 | 25 | 469 | 541 | 25 | 76 | 60,5 | — | — | 5.000 |
| PT2S-100/900 | 100 | 25 | 25 | 567 | 639 | 25 | 76 | 60,5 | — | — | 5.000 |
| PT2S-112/600 | 112 | 31 | 30 | 419 | 491 | 25 | 85 | 65 | — | — | 6.000 |
| PT2S-112/700 | 112 | 31 | 30 | 469 | 541 | 25 | 85 | 65 | — | — | 6.000 |
| PT2S-112/900 | 112 | 31 | 30 | 567 | 639 | 25 | 85 | 65 | — | — | 6.000 |
| PT2S-140/700 | 135 | 37 | 35 | 469 | 544 | 28 | 106 | 85 | — | — | 9.500 |
| PT2S-140/900 | 135 | 37 | 35 | 567 | 642 | 28 | 106 | 85 | — | — | 9.500 |
| PT3S-100/1050 | 100 | 25 | 25 | 469 | 537 | 25 | 76 | 60,5 | 42 | — | 4.000 |
| PT3S-112/900 | 112 | 31 | 25 | 419 | 497 | 25 | 85 | 65 | 47 | — | 5.000 |
| PT3S-112/1050 | 112 | 31 | 25 | 469 | 547 | 25 | 85 | 65 | 47 | — | 5.000 |
| PT3S-112/1500 | 112 | 31 | 25 | 619 | 697 | 25 | 85 | 65 | 47 | — | 5.000 |
| PT3S-140/900 | 135 | 37 | 30 | 419 | 500 | 28 | 106 | 85 | 65 | — | 7.500 |
| PT3S-140/1050 | 135 | 37 | 30 | 469 | 550 | 28 | 106 | 85 | 65 | — | 7.500 |
| PT3S-140/1200 | 135 | 37 | 30 | 519 | 600 | 28 | 106 | 85 | 65 | — | 7.500 |
| PT3S-140/1300 | 135 | 37 | 30 | 552 | 633 | 28 | 106 | 85 | 65 | — | 7.500 |
| PT3S-140/1500 | 135 | 37 | 30 | 619 | 700 | 28 | 106 | 85 | 65 | — | 7.500 |
| PT3S-145/1050 | 140 | 37 | 35 | 469 | 550 | 28 | 114 | 95 | 75 | — | 8.500 |
| PT3S-145/1300 | 140 | 37 | 35 | 552 | 633 | 28 | 114 | 95 | 75 | — | 8.500 |
| PT3S-160/1050 | 160 | 37 | 35 | 475 | 555 | 28 | 130 | 106 | 85 | — | 13.000 |
| PT3S-160/1300 | 160 | 37 | 35 | 557 | 638 | 28 | 130 | 106 | 85 | — | 13.000 |
| PT3S-160/1500 | 160 | 37 | 35 | 625 | 705 | 28 | 130 | 106 | 85 | — | 13.000 |
| PT3S-180/1050 | 180 | 45 | 40 | 475 | 562 | 35 | 145 | 120 | 97 | — | 15.000 |
| PT3S-180/1200 | 180 | 45 | 40 | 525 | 612 | 35 | 145 | 120 | 97 | — | 15.000 |
| PT4S-140/1200 | 135 | 37 | 25 | 419 | 506 | 28 | 106 | 85 | 65 | 47 | 7.000 |
| PT4S-140/1400 | 135 | 37 | 25 | 469 | 556 | 28 | 106 | 85 | 65 | 47 | 7.000 |
| PT4S-140/2000 | 135 | 37 | 25 | 619 | 706 | 28 | 106 | 85 | 65 | 47 | 7.000 |
| PT4S-160/1400 | 160 | 37 | 30 | 475 | 561 | 28 | 130 | 106 | 85 | 65 | 12.500 |
| PT4S-160/1730 | 160 | 37 | 30 | 557 | 644 | 28 | 130 | 106 | 85 | 65 | 12.500 |
| PT4S-160/2000 | 160 | 37 | 30 | 625 | 711 | 28 | 130 | 106 | 85 | 65 | 12.500 |
| PT4S-180/1400 | 180 | 45 | 35 | 475 | 568 | 35 | 145 | 120 | 97 | 75 | 14.500 |
| PT4S-180/1600 | 180 | 45 | 35 | 525 | 618 | 35 | 145 | 120 | 97 | 75 | 14.500 |